


2019
Governor's Cup
PRESHIFT CONTEST
VENTILATION PLAN

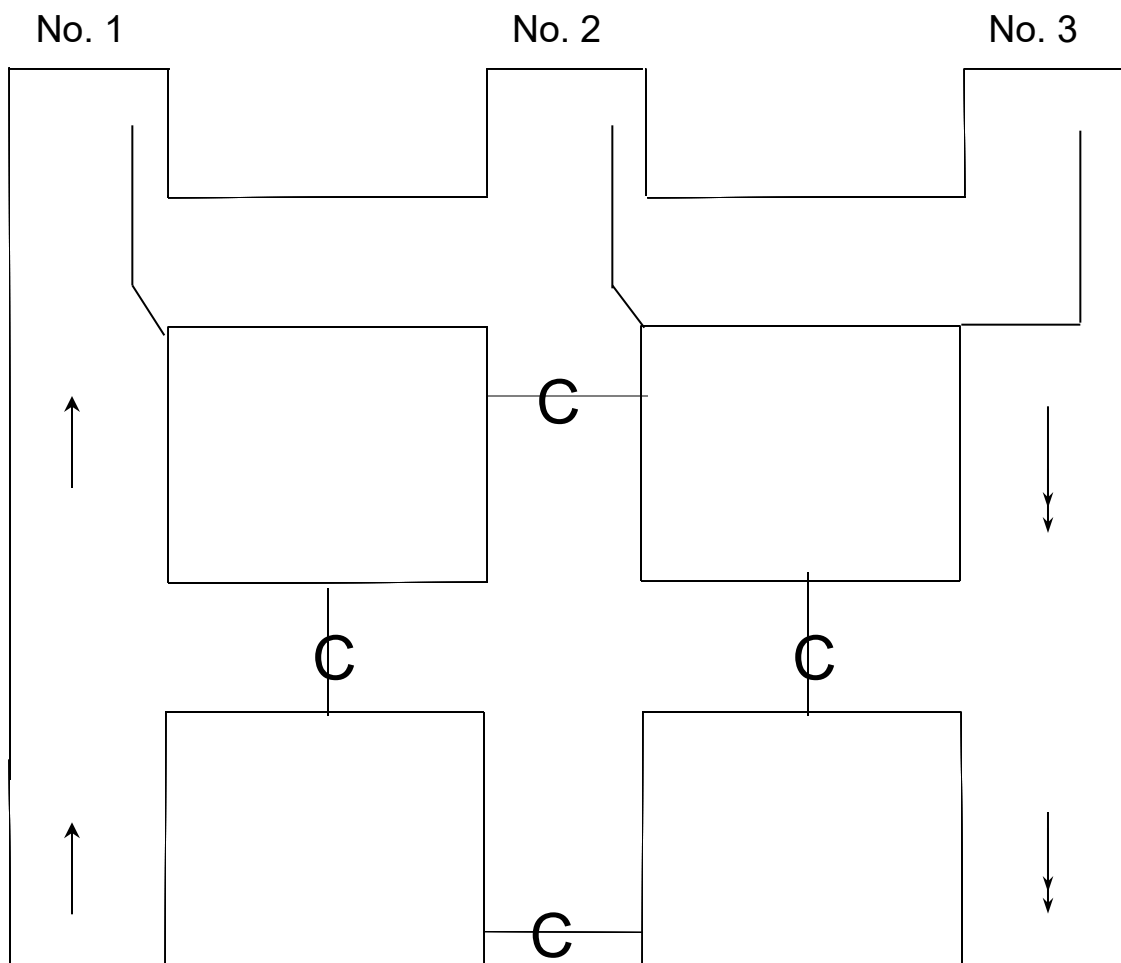

- Line curtain required where the continuous miner is cutting or loading coal.
- Line curtain required in face area where the roof bolting machine is located.
- Line curtain required to be maintained 10 ft. from the deepest point of penetration.
- A minimum of 12, 000 CFM required in the last open crosscut.
- Maximum cut depth not to exceed 20 ft.
- All face ventilation is exhausting.